




EO29 electric

Edelstahl Kochmulde 2Fach mit Knebelsteuerung
Steckerfertig (Autark)

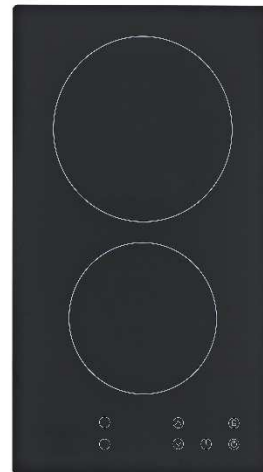

EB-GK2-TC

Edelstahl Kochmulde 2Fach mit Touch Control
Steckerfertig (Autark)

Technical specification

Connected load	3,0 KW
Rated voltage	230V AC voltage
connection	Via permanently welded Schuko angled plug, plus a dual grounding system, line H05V2V2-F 3x1.5mm ² around 1.5m
Regulation	via seamless energy regulator
Front hot plate	fast hot plate with 1500W power Ø145mm. The hot plates have a reduced residual heat output, i. e. the power is reduced from 1500 to 500 W (norm. fast hot plates 750 W) for saving energy and reducing the risk of overheating of the appliance and surroundings
back hot plate	fast hot plate with 1500W power Ø180mm. The hot plates have a reduced residual heat output, i. e. the power is reduced from 2000 to 850 W (norm. fast hot plates 1150 W) for saving energy and reducing the risk of overheating of the appliance and surroundings
Control light	Display is on if unit

Dimensions

Mass frame W x D	290x510mm
Mass section W x D	270x490mm
Installations depth	50mm

Technical specification

Connected load	3,0 KW
Rated voltage	220-240V AC voltage
connection	Via permanently welded Schuko angled plug, plus a dual grounding system, line H05V2V2-F 3x1.5mm ² around 1.5m
Regulation	via seamless energy regulator
Front radiant heating element	Highlight radiant heating element with 1200W power Ø145mm. 220-240V
Back radiant heating element	Highlight radiant heating element with 1800W power Ø180mm. 220-240V
Residual heat indicator	yes
Heating level	
Timer	yes

Dimensions

Mass frame W x D	290x510mm
Mass section W x D	265x485mm
Installations depth	40mm



Master E2 Induction

Technical specification

mass	288 x 56 x 520 mm
Output	3500 Watt (1500 & 2000 Watt)
Connected load	230 V / 50 Hz
	Test mark GS, CE

Product properties

- Induction cooktop with 2 cooking zones
- 3500 Watt
- 230 V Plug connector
- All-glass Schott Ceran ® surface
- environmentally friendly Ceran Suprema ®
- Sensor-touch operation
- Easy to read, large digital display
- Timer and power levels at each hob individually adjustable
- 9 power levels per plate
- Timer function 1 -99 minutes in 1 minute interval
- Lock (setting protection / Child safety device)
- safely through Automatic pan recognition
- automatic overheating protection
- automatic shutdown when not in use